

PRE-CAST RISING WALLS

**A Faster, Cleaner, More Reliable
Start to Every Build**



**A smarter way to build
with pre-cast concrete.**

- ✓ Faster installation
- ✓ Lower costs
- ✓ Better performance

BENEFITS

Designed for Speed, Accuracy and Efficiency



Every unit is produced in controlled conditions, ensuring the type of precision that keeps programmes tight and eliminates unnecessary site work.

Faster Installation & Reduced Labour



Units arrive ready to drop into position. No block-laying, no waiting, no hold-ups.

Less Wastage & Lower Costs



Precast components mean predictable quantities, minimal waste and cleaner, more organised sites.

High Strength & Reliable Accuracy




Consistent levels, straight lines and tight tolerances help avoid rework and ensure smooth progress through the foundation stage.



Easy to Transport & Store



Delivered exactly when needed, reducing clutter and simplifying site logistics.

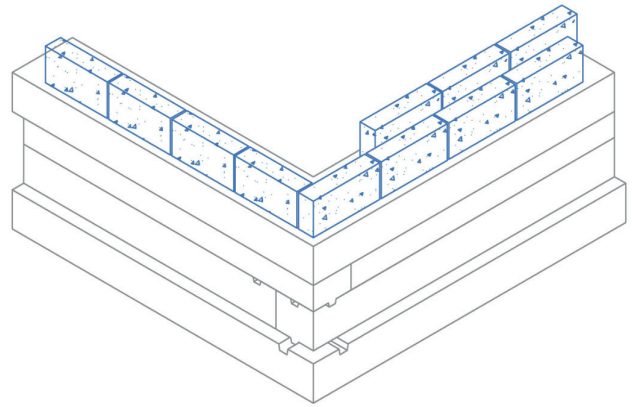

Indicates outline of 400 wide Rising Walls
Indicates structural Blockwork

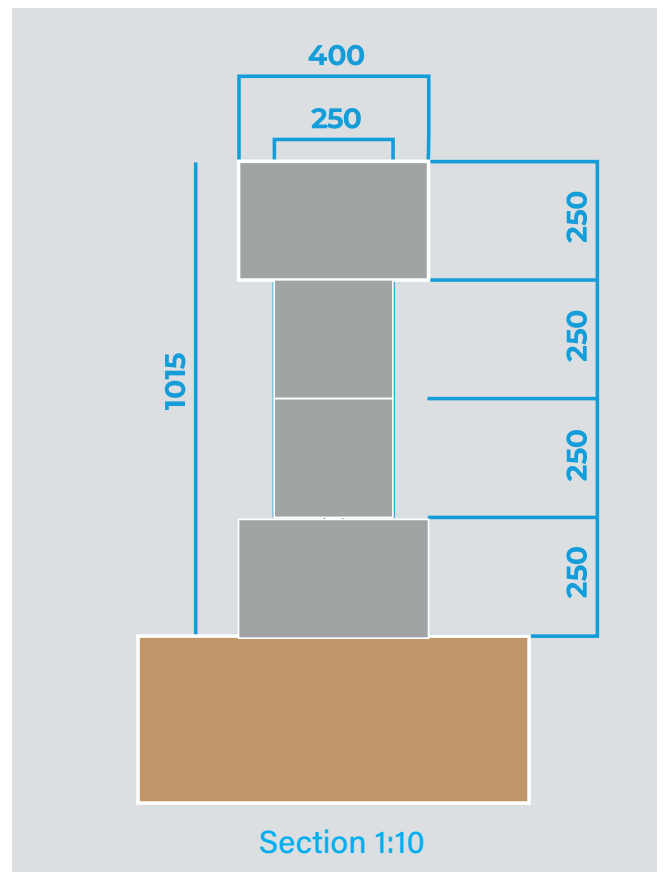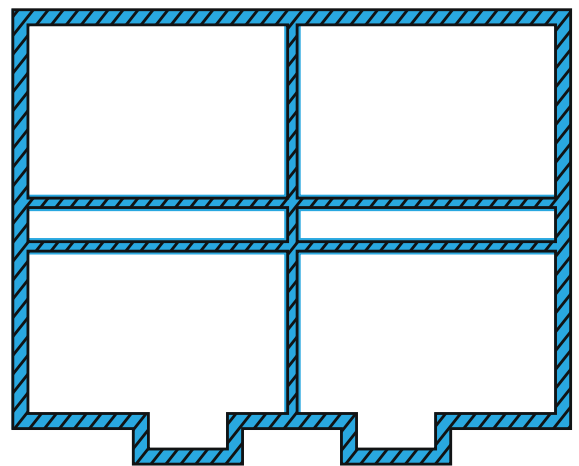

INSTALLATION

A Simple, Controlled Process

The system is designed for straightforward installation that keeps work flowing without interruption.

1. Delivered Ready for Installation

Units arrive prepared for immediate placement, reducing setup time.


2. Set in Position and Jointed Together

A quick, clean process that ensures accuracy and consistency.


3. Ready for the Next Stage Immediately

- ✓ No curing delays.
- ✓ Once fitted, you can proceed straight to the next phase of the build.


RISING WALL SEQUENCE

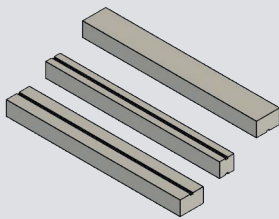



STEP 1. Lay 400mm wide corner pieces.

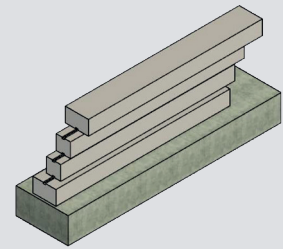




STEP 2. Lay 250mm wide x 225mm dp interlocking coursing elements.

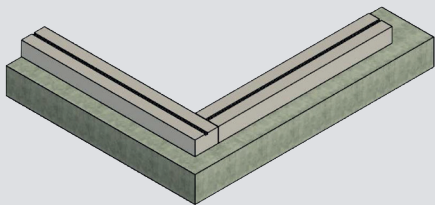

Step 3. Continue with 225 dp coursing until the required depth of foundations is achieved.

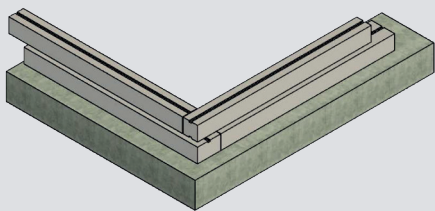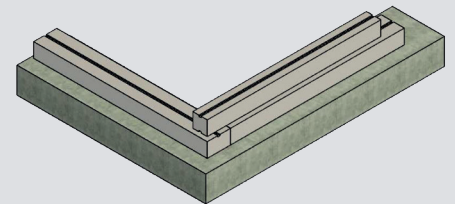

STEP 4. Complete the Rising Wall with the 400mm wide capping layer

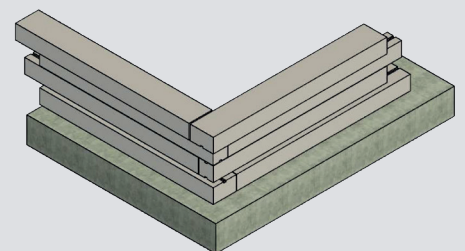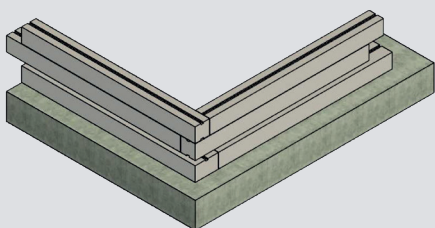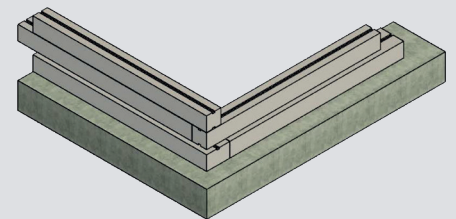

ABOUT, SUSTAINABILITY & CONTACT

Manufactured in Ireland for Consistent Quality

All Rising Wall units are produced locally, ensuring reliable supply, strong control standards and dependable turnaround times.

Each system is tailored to suit the specific requirements of the project and the conditions on site.

Built with Long-Term Responsibility in Mind

A focus on sustainability runs through every part of production and delivery.

Our commitment includes:

- **Business innovation**
- **Health, safety & wellbeing**
- **Waste reduction**
- **Energy conservation**

This approach supports cleaner, safer and more efficient building environments.

Get in Touch

Speak to Frank: +44 (0)7920 832358

Email: frank@cadi-offsite.ie

Email: tremayne@cadi-offsite.ie

Office: +353 (0)59 9164419

Website: cadioffsite.ie



- ✓ **Faster installation**
- ✓ **Lower costs**
- ✓ **Better performance**